



Self-cutting Cable Ties



Standard

Length	Color	Unit Qty	Part #
4"	Natural	50/bag	199333
		500/bag	199334
	UVB*	50/bag	199336
		500/bag	199337
6"	Natural	50/bag	199339
		500/bag	199340
	UVB*	50/bag	199342
		500/bag	199343
8"	Natural	20/bag	199274
		50/bag	199275
	UVB*	500/bag	199267
		20/bag	199276
11"	Natural	50/bag	199279
		500/bag	199268
	UVB*	20/bag	199280
		50/bag	199281
14"	Natural	500/bag	199265
		20/bag	199282
	UVB*	50/bag	199283
		500/bag	199269
14"	Natural	20/bag	199284
		50/bag	199285
	UVB*	500/bag	199286
		50/bag	199266

Save time and frustration using the latest innovation from Ancor, a self-cutting cable tie. Simply lock and twist to finish the job, with no need for additional tools! Integrated stainless steel blade leaves a clean flush cut, which improves appearance and eliminates the sharp tail while maintaining a tensile strength above industry standards.

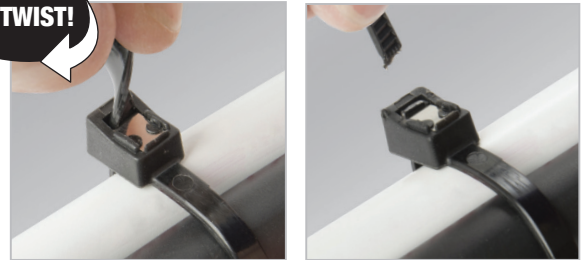

Mounting

Length	Color	Unit Qty	Part #
8"	Natural	20/bag	199309
		50/bag	199310
	UVB*	500/bag	199311
		20/bag	199300
11"	Natural	50/bag	199313
		500/bag	199314
	UVB*	20/bag	199303
		50/bag	199304
14"	Natural	500/bag	199305
		20/bag	199315
	UVB*	50/bag	199316
		500/bag	199317
14"	Natural	20/bag	199306
		50/bag	199307
	UVB*	500/bag	199308
		50/bag	199308



Heavy-duty

Length	Color	Unit Qty	Part #
15"	Natural	20/bag	199320
		100/bag	199321
	UVB*	20/bag	199318
		100/bag	199319
17"	Natural	10/bag	199323
	UVB*	10/bag	199322

* UV Resistant

	STANDARD					MOUNTING			HEAVY-DUTY	
	4"	6"	8"	11"	14"	8"	11"	14"	15"	17"
Material	Nylon 6/6	Nylon 6/6	Nylon 6/6	Nylon 6/6	Nylon 6/6	Nylon 6/6	Nylon 6/6	Nylon 6/6	Nylon 6/6	Nylon 6/6
Band Width	.14" (3.5mm)	.14" (3.5mm)	.17" (4.2mm)	.17" (4.2mm)	.17" (4.2mm)	.17" (4.2mm)	.17" (4.2mm)	.17" (4.2mm)	.28" (7.2mm)	.28" (7.2mm)
Bundle Diameter Range	1/4"-13/16" (.6-2.1cm)	1/4"-1-3/8" (.6-3.5cm)	3/8"-2" (1-5cm)	3/8"-3" (1-7.6cm)	3/8"-4" (1-10.2cm)	3/8"-2" (1-5cm)	3/8"-3" (1-7.6cm)	3/8"-4" (1-10.2cm)	5/8"-4" (1.6-10.2cm)	5/8"-5" (1.6-12.7cm)
Min. Loop Tensile Strength Lbs.	35 lbs	35 lbs	50 lbs	50 lbs	50 lbs	50 lbs	50 lbs	50 lbs	120 lbs	120 lbs
Material Flammability Rating	V-2	V-2	V-2	V-2	V-2	V-2	V-2	V-2	V-2	V-2
Operating Temperature	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)	32°F-185°F (0°C-85°C)
RoHS Compliance Status	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant